


Catene e accessori Winner - Grado 10

Winner chain and
accessory system in G10

Complessivo ad un braccio VMXKW 1

VMXKW 1 Single leg clevis master set

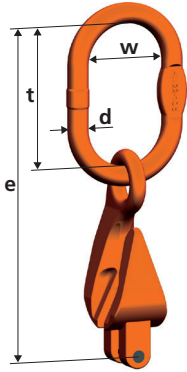


Tipo Type	Portata WLL Kg	Per catena For chain Ø	Per ganci DIN 15401 Fits on single hook acc. to DIN 15401 n°	Dimensioni Dimensions				Peso Weight Kg
				d mm	e mm	t mm	w mm	
VMXKW 1-5/6*	1400	6	4	14	204	120	70	0,74
VMXKW 1-7	1900	7	4	14	242	120	70	1,06
VMXKW 1-8	2500	8	5	16	262	140	80	1,30
VMXKW 1-10	4000	10	6	19	319	160	95	2,34
VMXKW 1-13	6700	13	10	23	373	170	105	4,39
VMXKW 1-16	10000	16	11	27	424	190	110	7,45

* Idoneo anche per catena da 5 mm, con portata ridotta in accordo.

* May also be used with a 5 mm chain, if load capacity is adjusted accordingly.

Complessivo a due bracci VMXKW 2

VMXKW 2 Two legs clevis master set

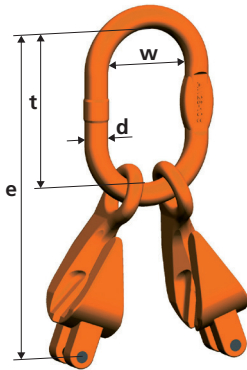


Tipo Type	Portata 0°-45°/45°-60° WLL 0°-45°/45°-60° Kg	Per catena For chain Ø	Per ganci DIN 15401 Fits on single hook acc. to DIN 15401 n°	Dimensioni Dimensions				Peso Weight Kg
				d mm	e mm	t mm	w mm	
VMXKW 2-5/6*	2000 / 1400	6	4	14	204	120	70	1,04
VMXKW 2-7	2650 / 1900	7	5	16	262	140	80	1,91
VMXKW 2-8	3550 / 2500	8	6	19	282	160	95	2,35
VMXKW 2-10	5600 / 4000	10	10	23	329	170	105	4,19
VMXKW 2-13	9500 / 6700	13	10	27	393	190	110	8,05
VMXKW 2-16	14000 / 10000	16	12	33	464	230	130	14,38

* Idoneo anche per catena da 5 mm, con portata ridotta in accordo.

* May also be used with a 5 mm chain, if load capacity is adjusted accordingly.

Complessivo a quattro bracci VMXKW 4

VMXKW 4 Four legs clevis master set

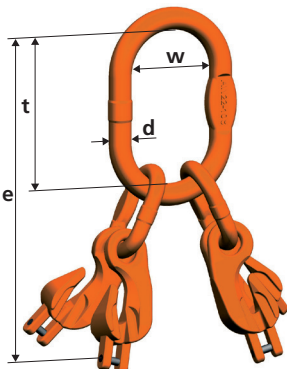

Tipo Type	Portata 0°-45°/45°-60° WLL 0°-45°/45°-60° Kg	Per catena For chain Ø	Per ganci DIN 15401 Fits on single hook acc. to DIN 15401 n°	Dimensioni Dimensions				Peso Weight Kg
				d mm	e mm	t mm	w mm	
VMXKW 4-5/6*	3000 / 2120	6	6	19	298	160	95	2,63
VMXKW 4-7	4000 / 2800	7	10	23	362	170	105	4,84
VMXKW 4-8	5300 / 3750	8	10	23	362	170	105	4,93
VMXKW 4-10	8000 / 6000	10	10	27	434	190	110	9,01
VMXKW 4-13	14000 / 10000	13	12	33	548	230	130	17,90
VMXKW 4-16	21200 / 15000	16	20	38	649	275	150	30,52

* Idoneo anche per catena da 5 mm, con portata ridotta in accordo.

* May also be used with a 5 mm chain, if load capacity is adjusted accordingly.