


Tenditori UNAV 6722 (ex UNI 2020) tipo OCCHIO-OCCHIO allungato

EYE-EYE type UNAV 6722 (ex UNI 2020) turnbuckles

UNAV 6722 tipo II
canaula aperta
UNAV 6722 type II
open body

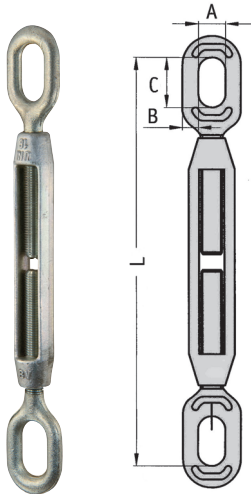

Codice Code	Misura Size	Portata WLL Kg	Tenditore Turnbuckle		Dimensioni Dimensions			Peso Weight
			Chiuso Closed	Aperto Open	A mm	B mm	C mm	Kg
			L mm	L mm				
ATENUNI2020IIB10	M10	250	260	375	16	10	28	0,40
ATENUNI2020IIB12	M12	400	300	425	20	12	35	0,60
ATENUNI2020IIB16	M16	630	360	495	25	15	45	1,10
ATENUNI2020IIB20	M20	1000	410	540	25	17	45	1,80
ATENUNI2020IIB22	M22	1600	460	595	30	22	56	2,90
ATENUNI2020IIB27	M27	2000	505	640	30	22	60	3,70
ATENUNI2020IIB30	M30	2500	560	705	36	27	70	5,80
ATENUNI2020IIB33	M33	3150	565	745	36	27	70	7,00
ATENUNI2020IIB36	M36	4000	625	815	42	33	85	10,10
ATENUNI2020IIB39	M39	5000	650	855	42	33	85	11,40
ATENUNI2020IIB45	M45	6300	725	945	48	37	95	17,00
ATENUNI2020IIB52	M52	8000	790	1030	55	41	105	23,70
ATENUNI2020IIB56	M56	10000	845	1100	60	46	115	32,40
ATENUNI2020IIB64	M64	12500	945	1215	66	51	135	45,70
ATENUNI2020IIB72	M72	16000	1025	1315	74	57	150	61,40
ATENUNI2020IIB76	M76	20000	1115	1425	81	62	165	79,50
ATENUNI2020IIB80	M80	25000	1205	1535	88	69	180	104,00

- Su richiesta disponibili tipo I - canaula chiusa.
- Upon demand type I available - closed body.

Non idonei per sollevamento.
Not suitable for lifting purposes.

- Finitura: zincatura elettrolitica.
- Coefficiente di sicurezza 5.
- Finish: electrolytic galvanized.
- Safety factor 5.